

CHATHAM COUNTY PURCHASING DEPARTMENT

ADDENDUM NO. 1 TO BID NO.17-0009-4

FOR: HUTCHINSON ISLAND BULKHEAD REHABILITATION

PLEASE SEE THE FOLLOWING FOR ADDITIONS, CLARIFICATIONS AND/OR CHANGES:

QUESTIONS RECEIVED:

1. What known utilities are within the limits of construction and are as-builts available?
A) *There are no as-builts for the site and the contractor will be responsible for field verifying utilities prior to construction.*
2. Are soil borings available showing the groundwater elevation?
A) *Soil borings are not available for the site.*
3. Please clarify whether the schedule is 60 or 90 calendar days.
A) *It is 90 calendar days as stated on Page 25 of the ITB.*
4. Please clarify whether the liquidated damages are \$200 or \$500 per calendar day.
A) *Liquidated Damages shall be \$500 per day as stated on page 26 of the ITB.*
5. Will the ferry remain in operation during construction and if so what pedestrian access must be provided?
A) *The ferry operation will remain during construction. This only includes the landing that is farthest to the north that is located closest to the Westin. The landing along the Savannah River can be closed during construction.*
6. Will the floating docks be available to the contractor for access? If not, will they be removed from the area to allow access to the work?
A) *The floating docks along the Savannah River can be used by the contractor during construction at the contractor's risk. Any damage to the platforms must be repaired by the contractor. The docks may also be removed along the Savannah River but not to the landing that must remain in operation as mentioned in #5.*
7. How is Item 2 (Excavation) measured and paid? Is it a determined quantity? Meaning if we excavate 4000CY, do we only get paid 3400CY or is it actual surveyed cubic yards? I didn't see a spec section in the ITB or any measure and payment notes in the plans.
A) *To be in Grading Complete / Lump sum.*
8. How is Item 9 (Replace excavated material and compact) measured and paid? Is it a determined quantity? Meaning if we backfill 4000CY, do we only get paid 3400CY or is it actual surveyed cubic yards? I didn't see a spec section in the ITB or any measure and payment notes in the plans.

A) To be in Grading Complete / Lump Sum.

9. How is Item 10 (Remove and Replace Brick Pavers) measured and paid? Are we paid a neat line square footage (i.e. length of bulkhead X distance from bulkhead to backside of the grade beam) or are we paid actual SF needed to build the job? I didn't see a spec section in the ITB or any measure and payment notes in the plans.

A) To be Lump Sum.

10. What is the bolt pattern and spacing for the 4.25" dia SS self tapping hex screws noted on the details of plan sheet S-2?

A) They are 4- 0.25" diameter self-tapping screws. They should be spaced 2" from the centerline of the pipe symmetrically top-bottom and left to right.


NOTE: Due to more questions received, there will be an Addendum 2 issued as soon as it is completed. Because of this, the Bid Opening Date has been extended one week.

BID OPENING HAS BEEN EXTENDED TO:

2:00 PM, WEDNESDAY, MARCH 8, 2017

2/22/17

DATE

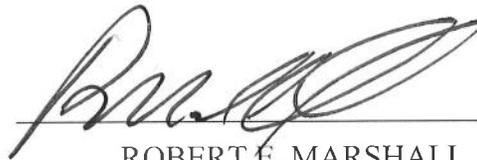

ROBERT E. MARSHALL
SENIOR PROCUREMENT SPECIALIST
CHATHAM COUNTY